

PJD AMPLIFIERS




Tweed 4

User Manual

IMPORTANT SAFETY INSTRUCTIONS

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Mains powered apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.
- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Turning off the power switch does not completely isolate this product from the power line so remove the plug from the socket if not using it for extended periods of time.
- Install this product near the wall socket and keep the power plug easily accessible.
- WARNING—This apparatus shall be connected to a mains socket outlet with a protective earth connection.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Do not install this equipment in a confined space such as a box for the conveyance or similar unit.
- Excessive sound pressure levels can cause hearing loss.
- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.





The lightning flash with arrowhead symbol within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

	CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN	
AVERTISSEMENT: RISQUE DE CHOC ÉLECTRIQUE—NE PAS OUVRIR.		
注意 感電の恐れあり、キャビネットをあけるな		



Caution

To reduce the risk of electrical shock do not remove the rear cover. No user serviceable parts inside.



Caution

This amplifier is capable of producing very high sound pressure levels which may cause temporary or permanent hearing damage. Use caution when setting or adjusting volume levels during use.



Caution

Fuses and valves in this appliance must only be replaced with equivalent items of the correct type and rating.



Warning

Switch off appliance and disconnect plug from mains before replacing fuses or valves. Allow valves to cool before removing.



Correct disposal of this product: This symbol indicates that this product should not be disposed of with your household waste, according to the WEEE directive (2002/96/EC) and your national law. This product should be handed over to an authorized collection site for recycling waste electrical and electronic equipment (EEE). Improper handling of this type of waste could have a possible negative impact on the environment and human health due to potentially hazardous substances that are generally associated with EEE. At the same time, your cooperation in the correct disposal of this product will contribute to the effective usage of natural resources. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, waste authority, or your household waste disposal service.


Tweed 4 Amp

The Tweed 4 is a recreation of the classic Fender Champ™ 5f1 model from the 1950's it produces around 4 watts RMS making it the perfect amp for home or studio use. With a single 6V6 output valve in cathode biased class A mode the Tweed 4 recreates the classic Fender Champ tones that have been used on countless classic recordings.

Features include:


- Hand built and hand wired in the UK to the highest standard.
- All valve signal path.
- Single channel class A amplifier.
- 8 inch alnico Jensen P8R speaker.
- 5Y3 rectifier valve.
- 12AX7 preamp valve.
- 6V6GT output valve.
- High quality components chosen for vintage tone and low noise.
- High quality tweed covered cabinet.

Front Panel

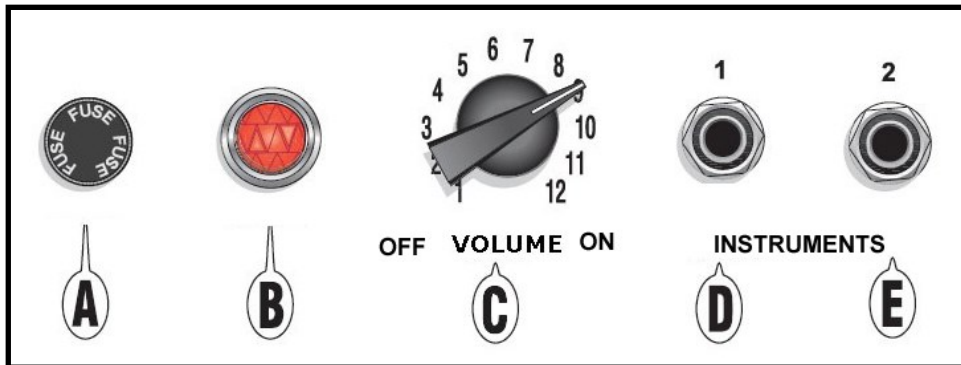

- A. Fuse. Protects the unit from electrical faults. Only replace with a fuse of the correct rating (T1A 250v).
- B. Indicator light. Illuminates when power to the unit is turned on.
- C. On / off switch and volume control. Turn control fully counter clockwise to power off the unit, turn clockwise to switch on the unit and increase the volume.
- D. Input 1. High gain.
- E. Input 2. Low gain.

Rear Panel

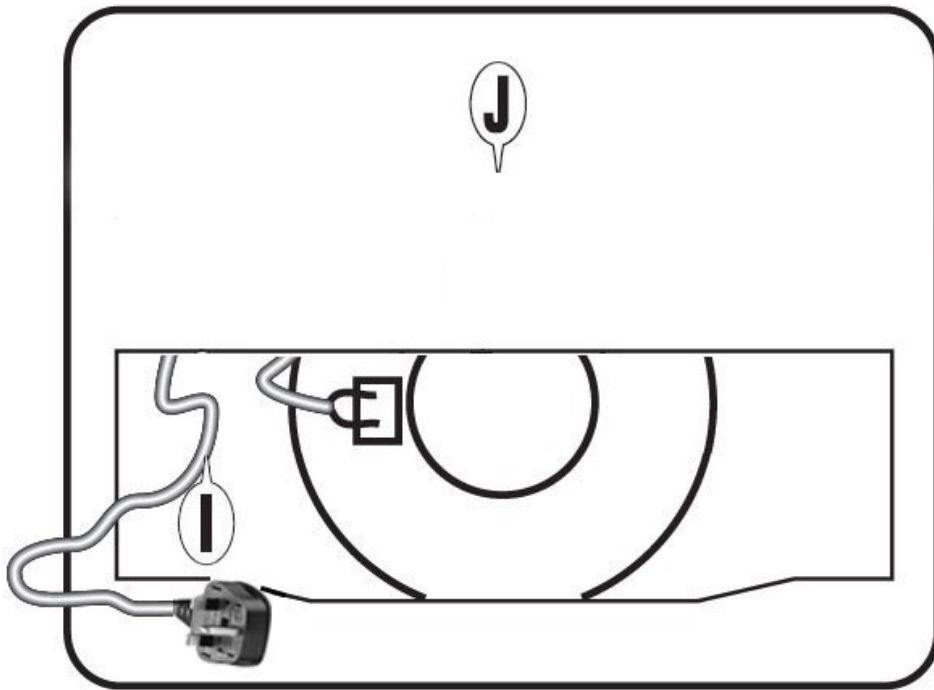

- I. Power cord. Connect to a grounded AC outlet (220 – 240v ~ 50Hz).
- J. Speaker jack. Connection for the internal 8Ω speaker or external 8Ω speaker. To avoid damage to the amplifier never operate without a speaker of the correct impedance connected.



Caution

The speaker jack is located on the chassis behind the rear panel. Ensure that the amplifier is unplugged and the valves have cooled before reaching behind the panel.



Caution

Never operate this amplifier without a suitable speaker load connected — Serious damage may result to the unit if a suitable speaker load is not connected.

Specifications

- Dimensions (H x W x D) 305 x 345 x 190mm
- Weight 6 Kg
- Output Power 4 Watts RMS into 8 ohms
- Speaker 8 inch 8 ohm Alnico
- Inputs High and low gain jacks
- Outputs Jack connector for internal speaker
- Valves V1 12AX7, V2 6V6GT, V3 5Y3GT
- Power Supply 220 – 240v ~ 50Hz
- Power Consumption 40 Watts

The information contained in this manual is subject to change without notice. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express permission of PJD Amplifiers.